



Conductivity Transmitters Using 4-Ring Technology

CDTX1201 Series



- ✓ Virtually Immune to Contamination
- ✓ Built-In Temperature Sensor on the Probe and the Transmitter's ATC Circuitry with a β of 2%
- ✓ Direct Connection of the Probe to the Transmitter Ensures a Positive Electrical Connection with No Signal Loss over Long Distances
- ✓ 2 Versions are Available: CDTX1200 (Without an LCD), and the CDTX1200-D [With LCD (Allows Easy Verification and Monitoring of Measured Values, and is Easier to Calibrate and Maintain)]
- ✓ Should be Used in Conjunction with the CDE-1201 In-Line Probe or CDE-1202 Tank Probe with External Threads

CONDUCTIVITY, 4-RING TECHNOLOGY

The CDTX1200 Series conductivity transmitters use top-of-the-line, 4-ring potentiometric probes. The 4-ring potentiometric method provides much higher accuracy and repeatability than the 2-ring amperometric method. When measuring liquids that have a high conductivity, the 2-ring system is susceptible to polarization. This condition makes it difficult to obtain accurate measurements. Polarization is directly related to the electrode's current load, and will cause a considerable non-linear drop in the voltage. As a result, the solution around the electrode simulates a low-conductivity condition.

4-ring electrodes eliminate the polarization effect by splitting the 4 rings into 2 current electrodes and 2 voltage electrodes. When placed in a conductive liquid, the 2 current electrodes take the alternating voltage and create a current. This alternating current produces a buffer field from which polarization is absent. The voltage is then measured in this field, which ensures accurate readings.

Voltage electrodes carry very little current. This allows the electrodes to be arranged in such a way that the current electrodes, which are the most susceptible to polarization, are placed where they cannot affect the voltage electrodes. Consequently, the buffer field is large enough for the voltage electrodes to take accurate readings without being affected by polarization.



CDTX1201-D.

CDTX1201.

The wide range of OMEGA® conductivity probes includes models for industrial applications. Flow-thru and DIP versions are available. The latest additions to this family are probes with $\frac{1}{2}$ " and $\frac{3}{4}$ " external threads for mounting on commercial pipe tees.

The 4-pin CDE-1201 is a molded conductivity probe with pipe threads at both ends. The housing is fiber-reinforced polypropylene and can work with pressures up to 5 bar (72.5 psi) and temperatures as high as 80°C (176°F).

These probes combine the proven 4-ring potentiometric method with platinum sensors and a stainless steel external thread. The removable protective sleeve is made of Ultem®, which resists the harmful effects of most chemicals, and can be unscrewed for quick and easy maintenance. The new probes withstand temperatures up to 120°C (248°F) and pressures of up to 5 bar (72.5 psi). CDE-1202 incorporates an NTC sensor. A 10 m (33') cable is an available option.

All products shown smaller than actual size.



Specifications

Range:

- CDTX1201: 0.0 to 199.9 mS/cm
- CDTX1202: 0.00 to 19.99 mS/cm
- CDTX1203: 0 to 1999 μ S/cm
- CDTX1204: 0.0 to 199.9 μ S/cm

Resolution:

- CDTX1201: 0.1 mS/cm
- CDTX1202: 0.01 mS/cm
- CDTX1203: 1 μ S/cm
- CDTX1204: 0.1 μ S/cm

Accuracy: $\pm 2\%$ FS

Calibration: 4 mA (zero) ± 0.8 mA

Slope: ± 1.6 mA (90 to 110%)

Temperature Compensation:

Automatic from 0 to 50°C (32 to 122°F) with a β of 2%

Output: 4 to 20 mA non-isolated; max 500 Ω sinking signal

Power:

Without LCD: 15 to 30 Vdc

With LCD: 20 to 36 Vdc

Probe: CDE-1201 or CDE-1202 (not included)

Cable Length: 3 m (10')

Protection: NEMA 4 (IP65)

Operating Environment: 0 to 50°C (32 to 122°F)

0 to 95% RH (non-condensing)

Dimensions: 165 L x 110 W x 90 mm H (6.5 x 4.3 x 3.5")

Weight: 1 kg (2.2 lb)

Probe Specifications

Temp Compensation:

CDE1201 and CDE1202:

ATC 0 to 50°C (32 to 122°F)

Body Material:

CDE-1201: Polypropylene

CDE-1202: Ultem®

Working Temperature:

CDE-1201: 0 to 80°C (32 to 176°F)

CDE-1202: 0 to 120°C (32 to 248°F)

Max Pressure [@25°C(77°F)]:

CDE-1201 and CDE-1202: 5 bar (72.5 psi)


Cable Length: 3 m (10')



CDTX1201-D, shown smaller than actual size.




CDTX1201, shown smaller than actual size.

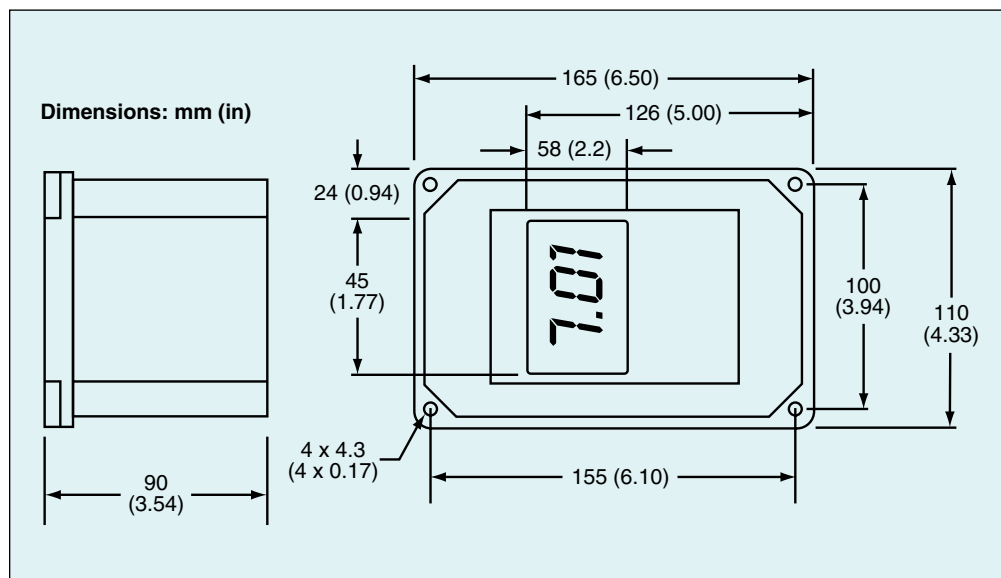




Dimensions for CDE-1201 Electrode

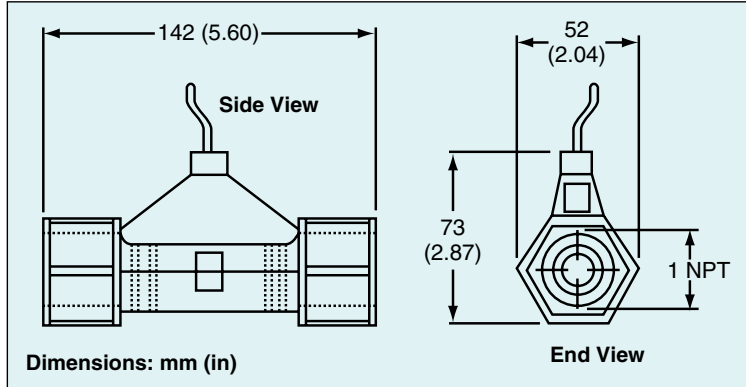

Dimensions for CDE-1202 Electrode

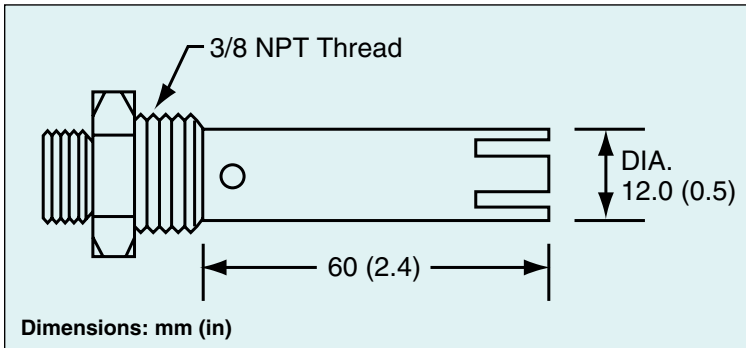

CDE-1202, submersible platinum conductivity probe.

To Order Visit omega.com/cdtx1200 for Pricing and Details

Model No.	Range	Description
CDTX1201	0.0 to 199.9 mS/cm	Conductivity transmitter
CDTX1201-D	0.0 to 199.9 mS/cm	Conductivity transmitter with display
CDTX1202	0.0 to 19.99 mS/cm	Conductivity transmitter
CDTX1202-D	0.0 to 19.99 mS/cm	Conductivity transmitter with display
CDTX1203	0.0 to 1999 μ S/cm	Conductivity transmitter
CDTX1203-D	0.0 to 1999 μ S/cm	Conductivity transmitter with display
CDTX1204	0.0 to 199.9 μ S/cm	Conductivity transmitter
CDTX1204-D	0.0 to 199.9 μ S/cm	Conductivity transmitter with display
CDE-1201	—	In-line 1 NPT polypropylene conductivity probe
CDE-1202	—	Submersible platinum conductivity probe
CDE-1200-CABLE	—	11.6 m (38') extension cable for CDE-1200 probes
CDSA-450	—	450 microSiemen conductivity standard, 1 qt
CDSA-1500	—	1500 microSiemen conductivity standard, 1 qt
CDSA-4500	—	4500 microSiemen conductivity standard, 1 qt
CCT-100	—	Loop isolator

Comes with complete operator's manual.

Ordering Examples: CDTX1203-D, 0.0 to 199.9 μ S/cm conductivity transmitter with display, CDE-1202, submersible platinum probe, CDS-1500, 1500 μ S/cm standard.

CDTX1201, conductivity transmitter with display, CDE-1201, in-line probe.

omega.co.uk[®]

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

www.omega.co.uk



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488
+44-(0)161-777-6611

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

FRANCE

www.omega.fr

0800-466-342

GERMANY

www.omega.de

Deckenfronn, Germany
0800-8266342

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters