

MICROSTEPPING MOTOR DRIVES



3540M Series
Starts at
\$275



Applied Motion Products
motors • drives • controls

3540M, \$275, shown smaller than actual size.



3540M

- Pulse and Direction Stepper Drive
- 3.5 A, 40 Vdc
- Switch Selectable Resolutions: 400, 1000, 2000 and 12,800 Steps/Rev

3540MO

- Stepper Drive with Digital Oscillator
- 3.5 A, 40 Vdc
- Resolution: 12,800 Steps/Rev
- Speed Range Select: High (25 rps) or Low (5 rps)
- 0 to 5V Analog Input, External Speed Signal, Pot or Joystick
- Tach Output: 5 to 24V Optically Isolated, 100 Pulses/Revolution
- Acceleration/Deceleration Range, 1 to 250 Revs/Sec²


Common Features

- DC Bus Voltage 12 to 42 Vdc Motor Supply (Including Ripple)
- Switch Selectable Motor Currents from 0.4 to 3.5 A/Phase
- Optically Isolated 5 Vdc Inputs for Step, Direction and Enable
- Enable Input to Turn Off Current to the Motor
- Screw Terminal Connectors
- MOSFET, Dual H-Bridge, Inaudible PWM Amplifier
- 3 State, Pulse Width Modulated Current Control, Switching at 20 to 30 KHz

The 3540M/MO step motor drivers are microstepping drives with up to 12,800 steps per revolution, step phase sequencer with MOSFET three state switching amplifiers and optoisolated circuits. Both drives include 5 optically isolated inputs, and the 3540MO features external speed control, tach output, and internal pots for accel/decel rate along with high/low speed range selection.



3540MO, \$345, shown smaller than actual size.

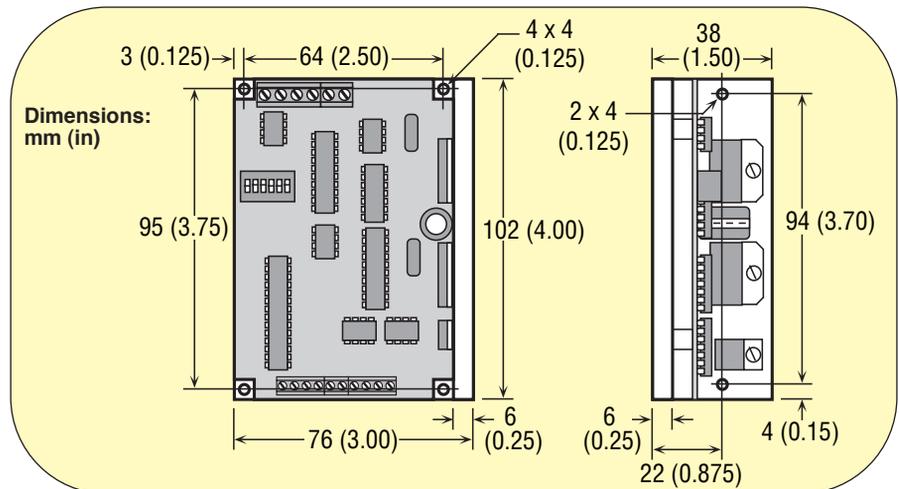

The 3540M is a step and direction drive, and includes an automatic feature (switch selectable) to reduce motor current by 50% when the motor is left at rest for more than one second. Additionally there is a switch selectable self-test which rotates the motor 1/2 revolution in each direction at 100 steps/second.

The 3540MO has an on-board oscillator which allows the motor speed to be controlled by an analog voltage or external joystick. This drive is ideal for continuous motion applications such as mixers and blenders. Microstepping resolution is selectable by DIP switch on the 3540M.

SPECIFICATIONS

Amplifiers: Dual, bipolar MOSFET H-bridge, pulse width modulated three state switching at 20 KHz. 12 to 42 Vdc input. 0.4 to 3.5 A/phase output current, switch selectable in 0.1 A increments. 122 W maximum output power. Automatic idle current reduction (switch selectable), reduces current to 50% of setting after one second

Inputs (3540M): Step, direction and enable, optically isolated, 5V logic. 5 mA/signal sink requirement. Motor steps on rising edge of step input. 0.5 μsec minimum pulse width. 2 μsec minimum set up time for direction signal.



Inputs (3540M): Run/stop (cw limit), direction (ccw limit), high/low speed and enable inputs are optically isolated, 5 to 24V logic. 3 to 15 mA input current. 2200 Ω input impedance. Can be configured for sinking or sourcing signals.

Recommended External Pot/Joystick Resistance: 1 to 5 K
Joystick Dead Zone: ±80 mV
Potentiometer/Analog Signal Dead Zone: 40 mV

Speed Ranges (3540M):

Low Speed Range: 0 to 5 rev/sec
High Speed Range: 0 to 25 rev/sec
Accel/Decel Range: 1 to 250 rev/sec/sec

Tach Output (3540M):

Phototransistor, open collector, open emitter. 24V max, 20 mA max. 100 pulses per motor revolution, 50% duty cycle (square wave).

Physical: Mounted on ¼ inch thick black anodized aluminum heat transfer chassis. 38.1 x 76.2 x 101.6 mm (1.5 x 3.0 x 4.0") overall. Power on red LED. Maximum chassis temperature: 70°C (158°F).

Connectors (3540M): European style screw terminal blocks

Max Wire Size: 18 AWG
Motor: 4 position (A+, A-, B+, B-)
DC Input: 2 position (V+, V-)
Signal Input: 4 position (+5, STEP, DIR, EN)

Connectors (3540MO): European style screw terminal blocks

Power Supply and Motor: 6 position
Wire Size: 12 to 28 AWG
Signal Input: 10 position
Wire Size: 16 to 28 AWG
Motor: 4 position (A+, A-, B+, B-)

Self Test (3540M): Switch selectable, rotates motor ½ revolution each direction at 100 steps/second, half step mode





Microstepping (3540M): Four switch selectable step resolutions with 1.8° motor. Half Step (400 steps/rev); ½ step (1000 s/r); ¼ step (2000 s/r); 1/64 step (12,800 s/r)



Microstepping (3540MO): 1/64 step (12,800 s/r) with 1.8° motor; pure sine waveform

CE Mark: Complies with EN55011A and EN50082-1(1992)


OPTIONAL ACCESSORIES

Power Supply (Required for Drive Operation): Recommended: OMPS150A24; 24 Vdc, 6.3 A, \$180. See page D-37 for more details on power supplies.

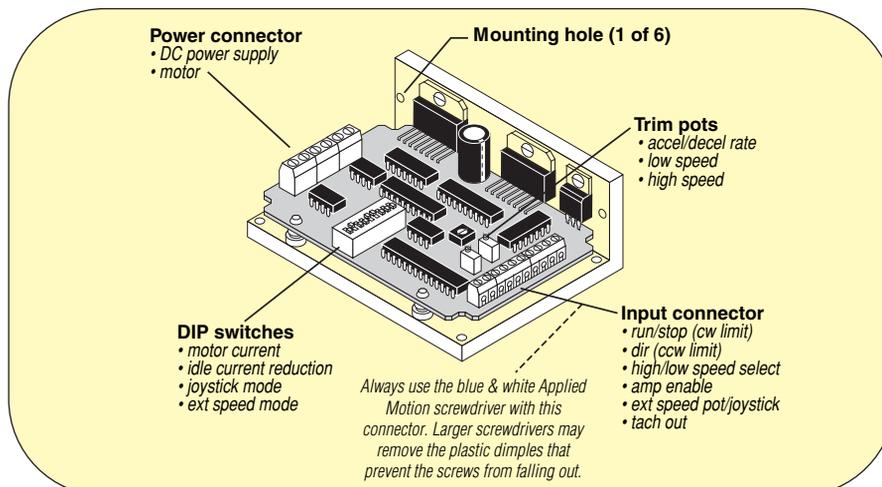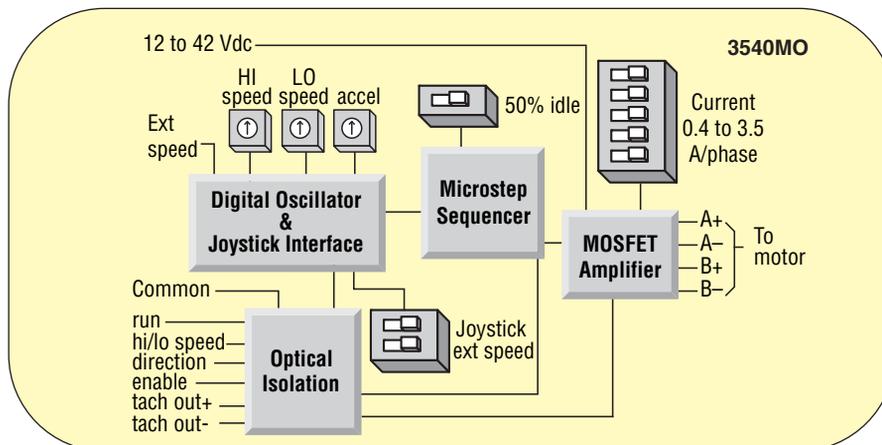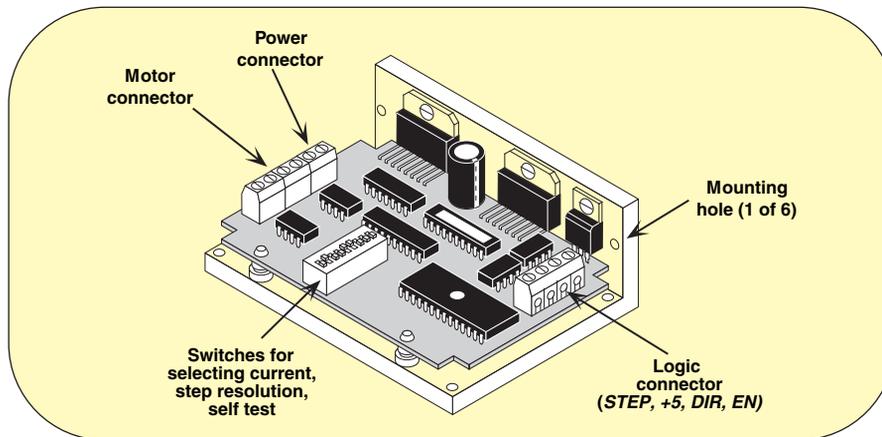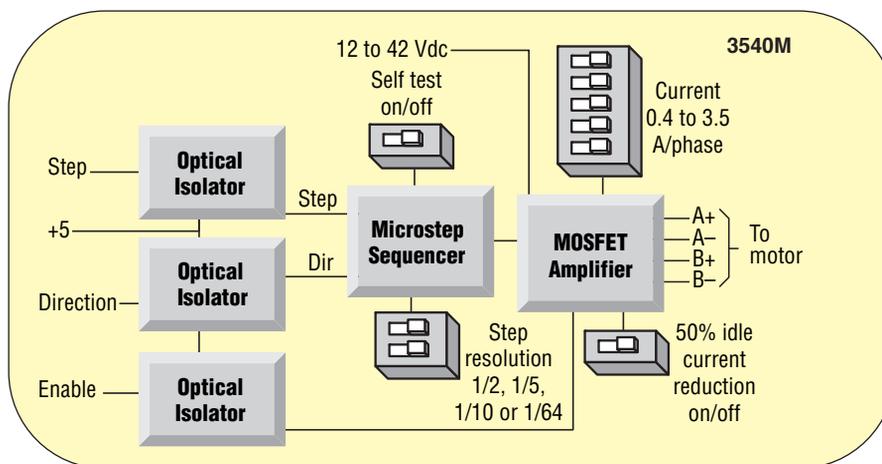

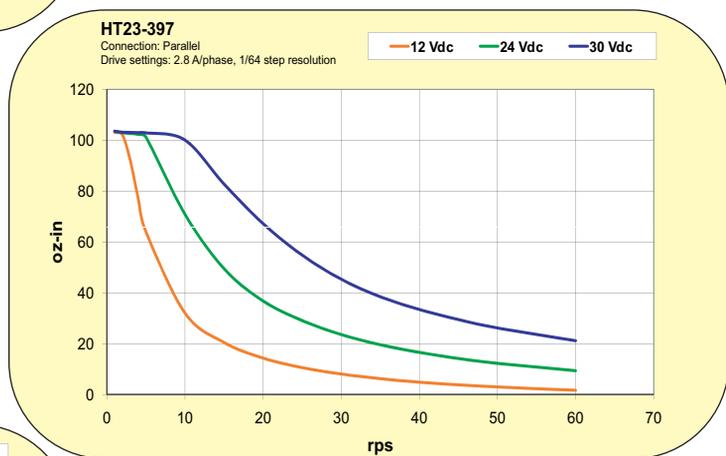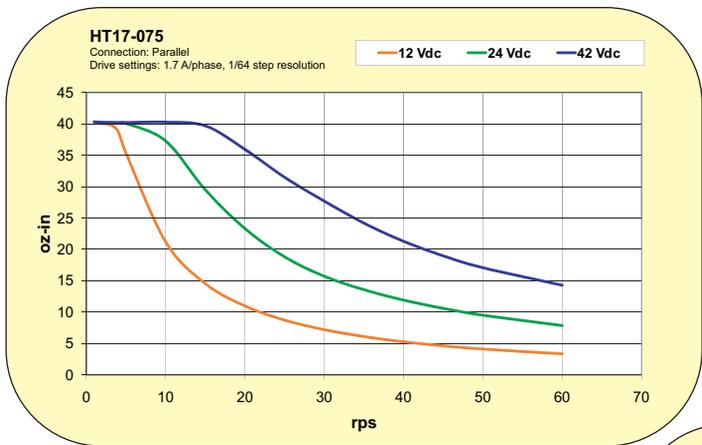

Torque vs. Speed Curves for 3540M/MO Drive-Motor Combinations

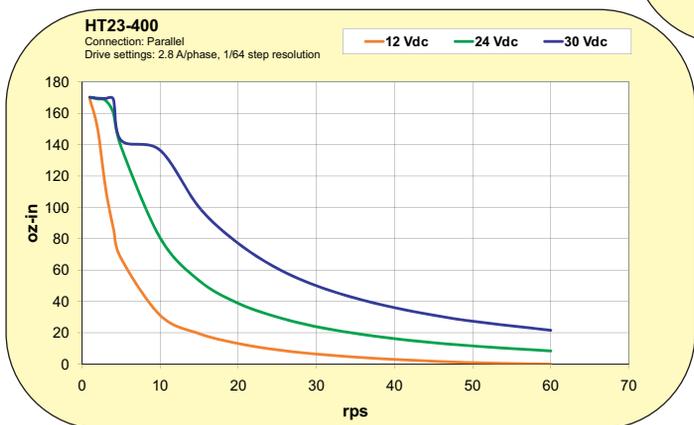

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
3540M	\$275	Microstepping step motor drive 12 to 42 Vdc
3540MO	345	Microstepping step motor drive with digital oscillator

Ordering Example: 3540M, microstepping step motor drive, \$275.

RECOMMENDED MOTORS FOR 3540M AND 3540MO

MODEL NO.	PRICE	HOLDING TORQUE g-cm (oz-in)	RATED VOLTAGE (V)	RATED CURRENT (A)	RESISTANCE OHMS	INDUCTANCE MH	ROTOR INERTIA g-cm ² (oz-in ²)
NEMA 17 STEP MOTOR SPECIFICATIONS (RATINGS ARE WITH MOTOR CONNECTED IN PARALLEL)							
OMHT17-075	\$90	4522 (62.8)	2.8	1.7	1.7	3.0	68 (0.37)
NEMA 23 STEP MOTOR SPECIFICATIONS (RATINGS ARE WITH MOTOR CONNECTED IN PARALLEL)							
OMHT23-397	\$125	12746 (177)	2.5	2.83	0.9	2.5	300 (1.64)
OMHT23-400	160	19011 (264)	3.2	2.83	1.1	3.6	480 (2.62)

Ordering Example: 3540MO, microstepping step motor drive with digital oscillator, OMHT17-075, NEMA 17 step motor with 62.8 oz-in minimum holding torque, \$345 + 90 = \$435.

See pages D-7 through 10 for additional step motor information.

ACCESSORY

MODEL NO.	PRICE	DESCRIPTION
OMPS150A24	\$180	Stepper drive power supply, 24 Vdc, 6.3 A

omega.co.uk[®]

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

www.omega.co.uk



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de

Deckenfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488
+44-(0)161-777-6611

FRANCE

www.omega.fr

0800-466-342

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters