


4-Channel Solid State Input/Output Modules AC/DC Sensing/Control

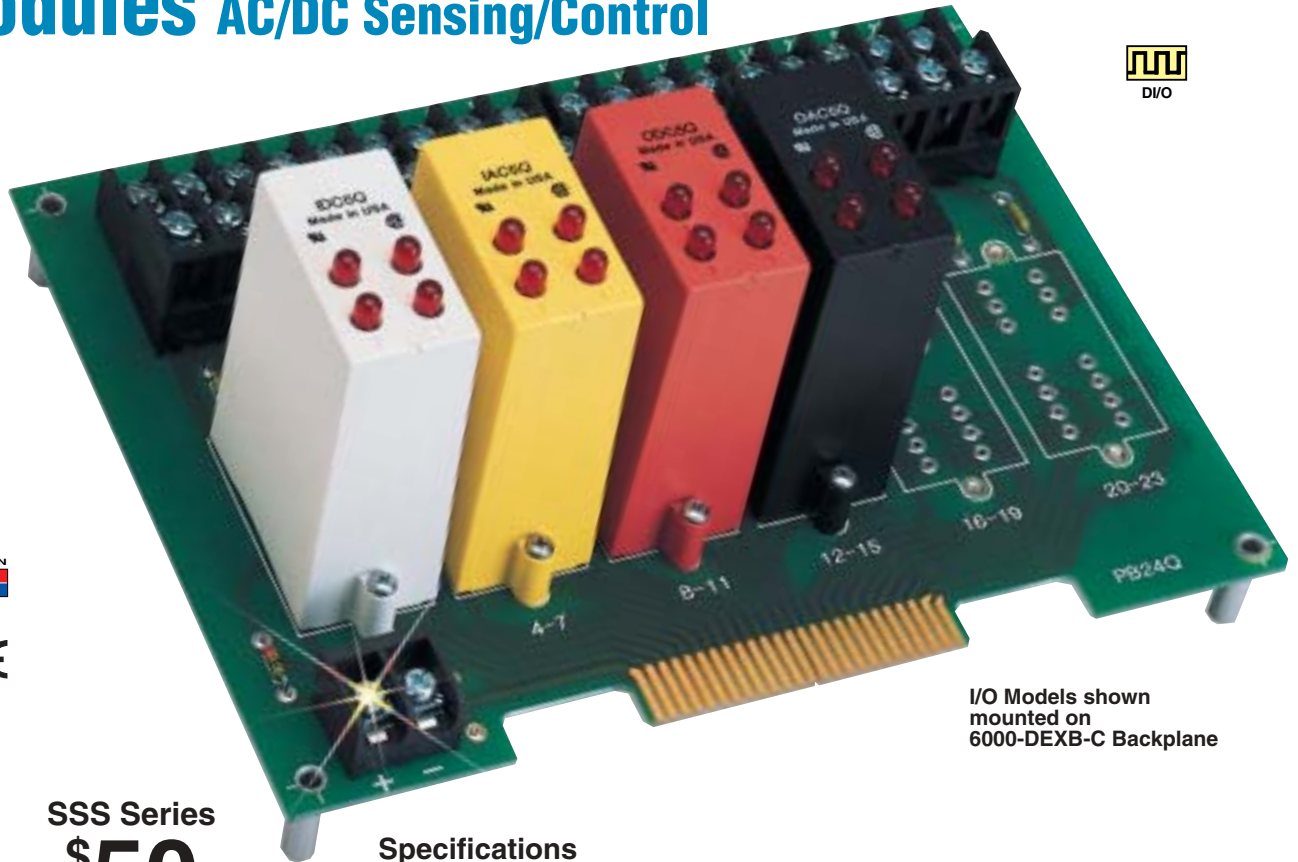

I/O Models shown mounted on 6000-DEXB-C Backplane

SSS Series
\$50
 Basic Unit

- ✓ 4 Channels in One Module
- ✓ 4000 Vrms Isolation
- ✓ AC/DC Input and Output Modules Available
- ✓ High Speed Input Module Available

Designed to minimize space requirements, the SSS-Q series 4-channel solid state switches replace 4 individual SSS modules. Providing a connection between data acquisition systems and the real world, these modules can sense or control ac/dc power lines. Input modules sense the presence of an ac/dc voltage, and send an input signal to the acquisition system. Output modules accept an output signal from the system, and will switch ac/dc power lines on or off.

Each module contains four channels of input or outputs. Up to 6 modules may be mounted on a 6000-DEXB-C backplane for a twenty-four channel system.

Specifications AC/DC INPUT QUAD MODULES INPUT

Model	SSS-QI120-C	SSS-QI240-C	SSS-QID32-C
Nominal Input Voltage	120 Vrms/Vdc	240 Vrms/Vdc	24 Vrms/48 Vdc
Max Input Voltage	140 Vrms/Vdc	280 Vrms/Vdc	60 Vrms/Vdc
Min Input Voltage	90 Vrms/Vdc	180 Vrms/Vdc	10 Vrms/Vdc
Max Input Current (@ max input voltage)	10 mA rms	8 mA rms	30 mA rmsn
Drop out Current	2.5 mA rms	1.5 mA rms	1.0 mA rms
Available Off-State Input	3.0 mA rms	2.0 mA rms	1.0 mA rms
Allowable Off-State Voltage	50 Vrms/Vdc	120 Vrms/Vdc	2 Vrms/Vdc

OUTPUT (SSS-QI120-C/QI240-C/QID32-C)
 Nominal Logic Supply Voltage: 5.0 Vdc
 Min Logic Voltage: 4.5 Vdc
 Max Logic Voltage: 6.0 Vdc
 Typical Logic Supply Current (@ nominal voltage): 10 mA dc
 Max Logic Supply Current (@ max logic voltage): 14.5 mA dc
 Max Logic Supply Leakage Current (@ max logic voltage): 20 µA dc
 Max Output Voltage: 30 Vdc
 Max Output Current: 50 mA dc
 Max Output Leakage Current (@ max logic voltage): 20 µA dc

Max Output Voltage Drop (@ max Output Current): 200 mVdc
GENERAL (SSS-QI120-C/QI240-C/QID32-C)
 Operating Ambient: -30 to 80°C (-22 to 176°F)
 Storage Temperature: -40 to 100°C (-40 to 212°F)
 Max Turn-On Time (@ nominal input voltage): 20 ms
 Max Turn-Off Time: 30 ms
 Isolation: 4000 Vrms
 Capacitance, Input to Output: 8 pF
 Line Frequency Range: 47 to 63 Hz

**DC INPUT QUAD MODULE –
SSS-QIDF16-C**

INPUT

Max Input Voltage: 32 Vdc
Min Input Voltage: 3.3 Vdc
Input Resistance: 1 kΩ
Max Input Current (@ max input voltage): 32 mA dc
Drop out Current: 1.0 mA dc
Available Off-State Input: 1.0 mA dc
Allowable Off-State Voltage: 2.0 Vdc

OUTPUT

Nominal Logic Supply Voltage: 5.0 Vdc
Min Logic Voltage: 4.5 Vdc
Max Logic Voltage: 6.0 Vdc
Typical Logic Supply Current (@ nominal voltage): 10 mA dc
Max Logic Supply Current (@ max logic voltage): 14.5 mA dc
Max Logic Supply Leakage Current (@ max logic voltage): 20 μA dc

Max Logic Supply Leakage Current (@ max logic voltage): 20 μA dc
Max Output Voltage: 30 Vdc
Max Output Current: 50 mA dc
Max Output Leakage Current (@ max logic voltage): 20 μA dc
Max Output Voltage Drop (@ max Output Current): 200 mVdc

GENERAL

Operating Ambient: -30 to 80°C (-22 to 176°F)
Storage Temperature: -40 to 100°C (-40 to 212°F)
Max Turn-On Time (@ nominal input voltage): 300 μs
Max Turn-Off Time: 600 μs
Isolation: 4000 Vrms
Capacitance, Input to Output: 8 pF

**DC OUTPUT QUAD MODULE –
SSS-QOD60-C**

INPUT

Nominal Input voltage: 5 Vdc
Min Input voltage: 4.0 Vdc
Max Input Voltage: 6.0 Vdc
Drop out Voltage: 1.0 Vdc
Max Input Current: 15 mA dc
Typical Input Current: 10 mA dc
Nominal Input Resistance: 240 Ω

OUTPUT

Max Line Voltage: 60 Vdc
Min Line Voltage: 3.0 Vdc
Max Off-State Voltage: 60 Vdc
Max Off-State Leakage: 1.0 mA dc
Max On-State Current: 3.0 A dc; derate 40 mA/°C above 20°C; when operating in I/O racks that share a common fuse between two channels, max on-state

current must not exceed a total of 3.75 A rms @ 20°C ambient for both channels

Min On-State Current: 10 mA dc

Max 1 Second Surge: 5 A dc

Peak On-State Voltage: 1.5 Vdc @ 25°C

Max Turn-On Time: 50 μs
Max Turn-Off Time: 100 μs

GENERAL

Operating Ambient: -30 to 80°C (-22 to 176°F)

Storage Temperature: -40 to 100°C (-40 to 212°F)

Isolation: 4000 Vrms
Capacitance, Input to Output: 8 pF

**AC OUTPUT QUAD MODULE –
SSS-QOA240-C**

INPUT

Nominal Input voltage: 5 Vdc
Min Input voltage: 4.0 Vdc
Max Input Voltage: 6.0 Vdc
Drop out Voltage: 1.0 Vdc
Max Input Current: 15 mA dc
Typical Input Current: 10 mA dc
Nominal Input Resistance: 240 Ω

OUTPUT

Nominal Line Voltage: 240 Vrms
Max Line Voltage: 280 Vrms
Min Line Voltage: 24 Vrms
Max Peak Off-State Voltage: 600 Vpeak
Max Off-State Leakage: 4.5 mA rms
Static Off-State (dv/dt): 200 V/μs

Max On-State

Current: 3.0 A rms; derate 40 mA/°C above 20°C; when operating in I/O racks that share a common fuse current must not exceed a total of 3.75 A rms @ 20°C ambient for both channels

Min On-State Current: 50 mA rms

Max 1 Cycle Surge: 100 Apeak

Peak On-State Voltage: 1.6 Vpeak

GENERAL

Operating Ambient: -30 to 80°C (-22 to 176°F)


Storage Temperature: -40 to 100°C (-40 to 212°F)

Response Time: 0.5 cycle

Isolation: 4000 Vrms

Capacitance, Input to Output: 8 pF

Line Frequency Range: 47 to 63 Hz

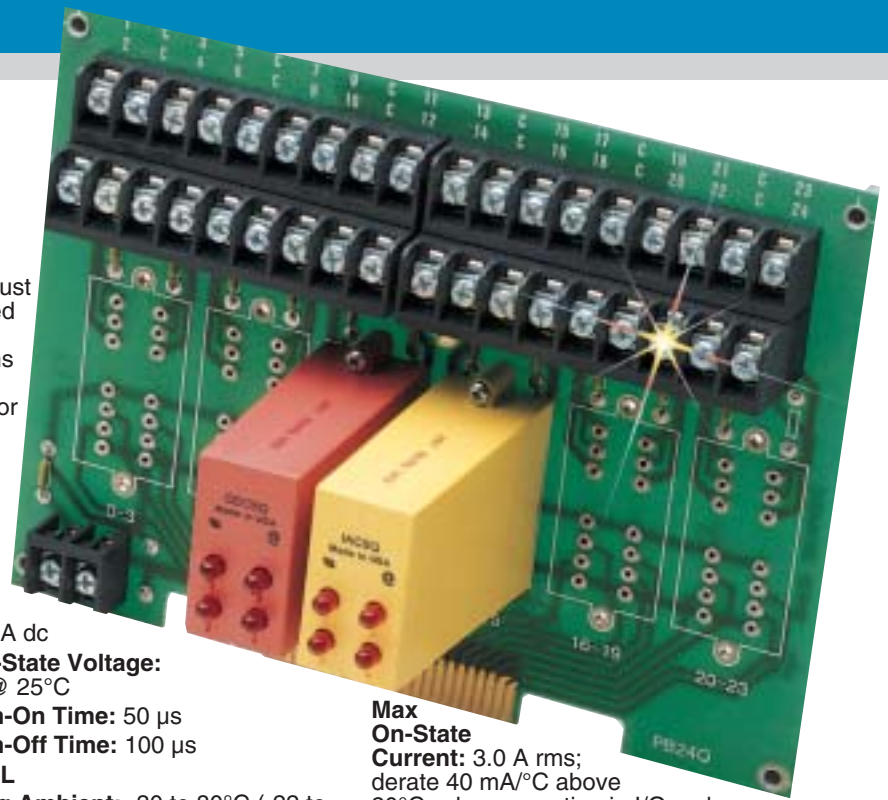

To Order (Specify Model Number)

Model Number	Price	Description
SSS-QI120-C	\$50	90 to 140 Vac/dc Input
SSS-QI240-C	50	180 to 280 Vac/dc Input
SSS-QIDF16-C	65	3.3 to 32 Vdc Fast Switching Input
SSS-QID32-C	50	10 to 60 Vac/dc Input
SSS-QOA240-C	50	24 to 280 Vac Output
SSS-QOD60-C	50	3 to 60 Vdc Output
6000-DEXB	144	Backplane for up to 6 modules

Ordering Example: four SSS-QI120-C 90 to 140 Vac/dc input modules, two SSS-QOA240-C 24 to 280 Vac output modules, and 6000-DEXB backplane, 4(50) + 2(50) + 144 = \$444.

omega.co.uk[®]

Your One-Stop Source for Process Measurement and Control!

Freephone 0800 488 488 | International +44(0) 161 777 6622 | Fax +44(0) 161 777 6622 | Sales@omega.co.uk

www.omega.co.uk



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488
+44-(0)161-777-6611

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

FRANCE

www.omega.fr

0800-466-342

GERMANY

www.omega.de

Deckenfronn, Germany
0800-8266342

BENELUX

www.omega.nl

0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders, Relative Humidity Measurement Instruments, PT100 Probes, PT100 Elements, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples, Thermowells and Head and Well Assemblies, Transmitters, Thermocouple Wire, RTD Probes

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485, Ethernet and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Pressure Transmitters, Strain Gauges, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters